

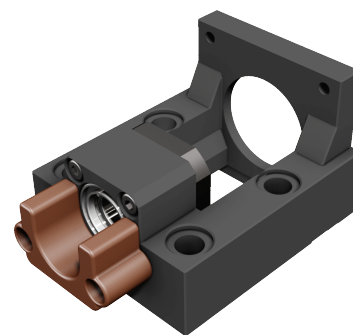


Motor Bracket MBCE10/12 / MBCF10/12




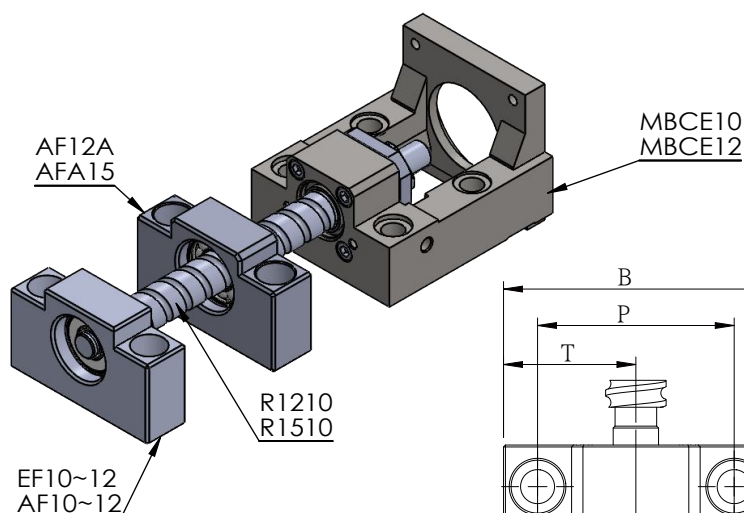


Surface treatment:
Black Oxide
/
Electroless Nickel Plating

No.	Part name	Qty
1	Housing	1
2	Bearing MBC*10 with bearings 7000 MBC*12 with bearings 7001	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

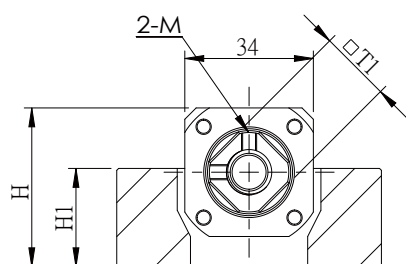

Section U-U

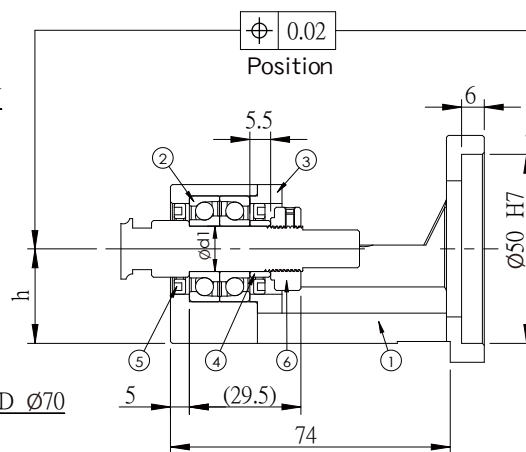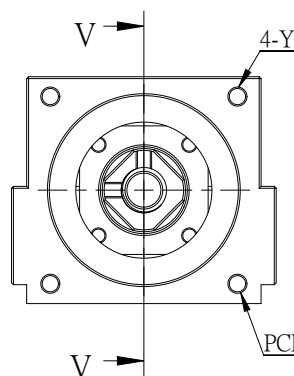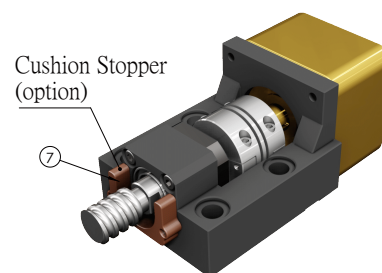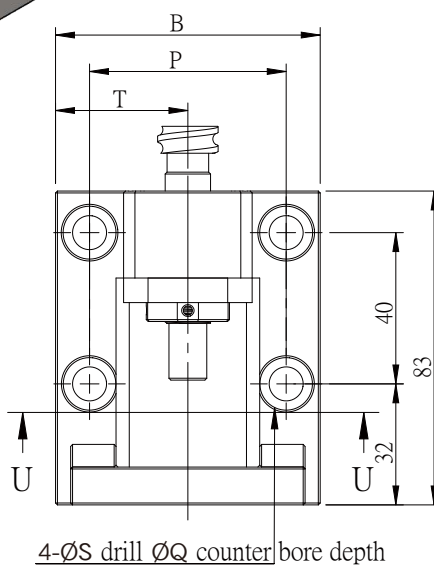

Section V-V

Unit : mm

Model No.	B	P	T	H	H1	h ±0.02	Shaft diameter d1	T1	M	Y	S	Q	Weight (Kgs)	Support unit	Suggest Coupling
														Supported-side	
MBCE10-D	70	52	35	42	26	25	10	16	M3	M5	9	14	0.89	EF10 AF10 AF12A AFA15	SGS 34C
MBCE10-DP										M4			0.89		
MBCE12-D	70	52	35	42	26	25	12	19	M4	M5	9	14	0.86	EF12 AF12 AFA15	SGS 34C
MBCE12-DP										M4			0.87		
MBCF10-D	63	50	31.5	37	21	20	10	16	M3	M5	6.6	11	0.69	LF12 LFA15	SGS 34C
MBCF10-DP										M4			0.7		
MBCF12-D	63	50	31.5	37	21	20	12	19	M4	M5	6.6	11	0.68	LF12 LFA15	SGS 34C
MBCF12-DP										M4			0.68		

Note :

1. The matched bearing in the support unit has already done the preload.
2. The matched P5 bearings are assembled in DF way, which is the most suitable for ball screw use.

Illustration for MBCF10/12

