

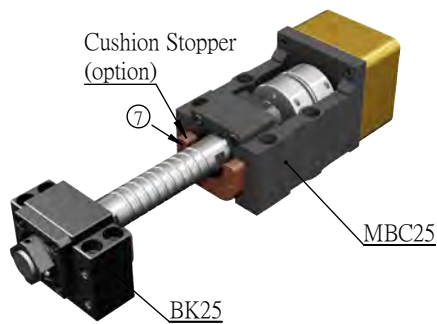


Motor Bracket MBC20H / MBC25


Fig→Fixed+Fixed

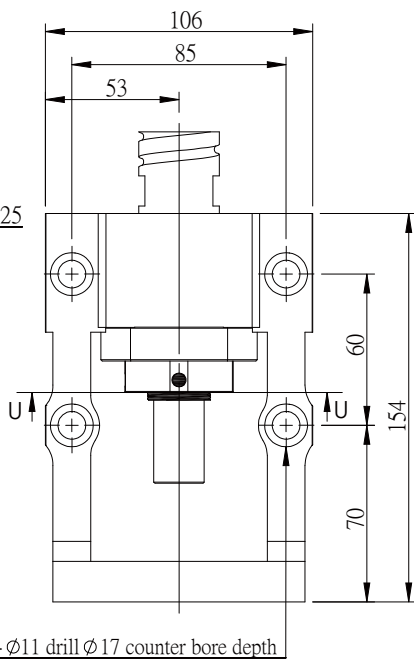

Fig→Fixed+Supported

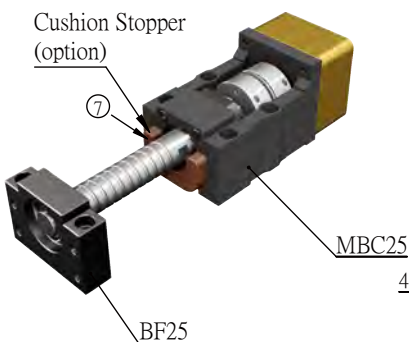


Surface treatment: Black Oxide

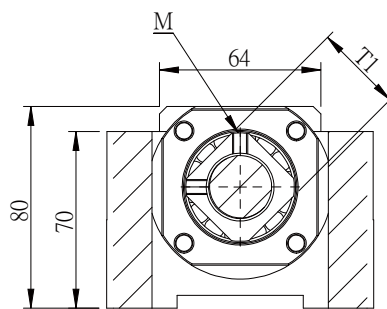

Section U-U

No.	Part name	Qty
1	Housing	1
2	Bearing	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

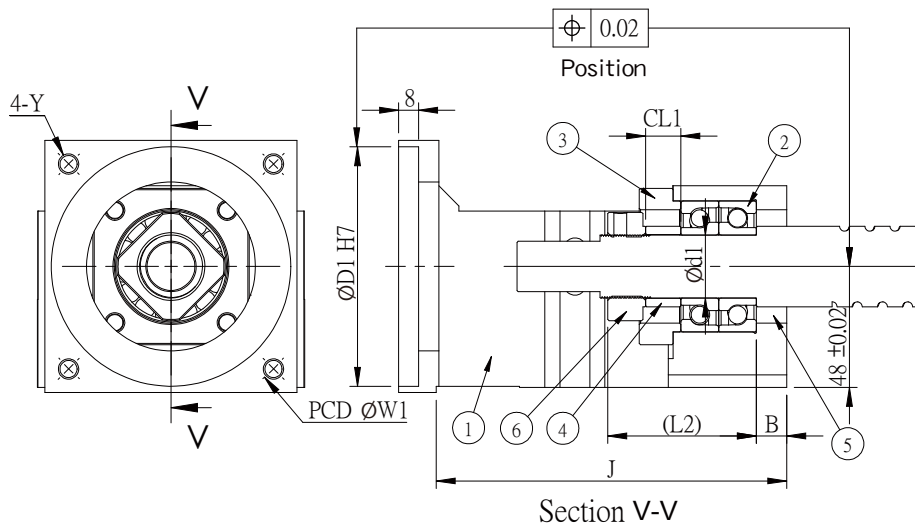

Section V-V

Unit : mm


Model No.	D1	W1	Y	J	Shaft diameter d1	CL1	B	L2	M	T1	Weight (Kgs)	Support unit	Suggest Coupling
MBCF20H-X	80	100	M6	flat	20	11	9	50	2-M4	□30	-	SK20	SGL 50C
MBCS20H-X	80	100	M6	flat	20	9	9	57	4-M6	Ø40	4.39	SF20	SGL 57C
MBC25-X	80	100	M6	flat	25	14	12	59	2-M6	□35	4.51	BK25	SGS 57C
MBC25-Y	95	115	M8	139	25	14	12	59	2-M6	□35	4.43	BF25	SGS 65C
MBC25-YP	95	115	M6	139	25	14	12	59	2-M6	□35	4.35	BF25	SGS 65C

Note : 1. The matched bearing in the support unit has already done the preload.
 2. The matched bearings are assembled in DF way, which is the most suitable for ball screw use.
 3. The accuracy of TAC bearing is P4 grade and 7204 、7205 is P5 grade.

Illustration for MBC25

Fixed+Fixed

Pattern: Servo motor
DELTA C11020
MITSUBISHI HC-RP103~203
□100X100

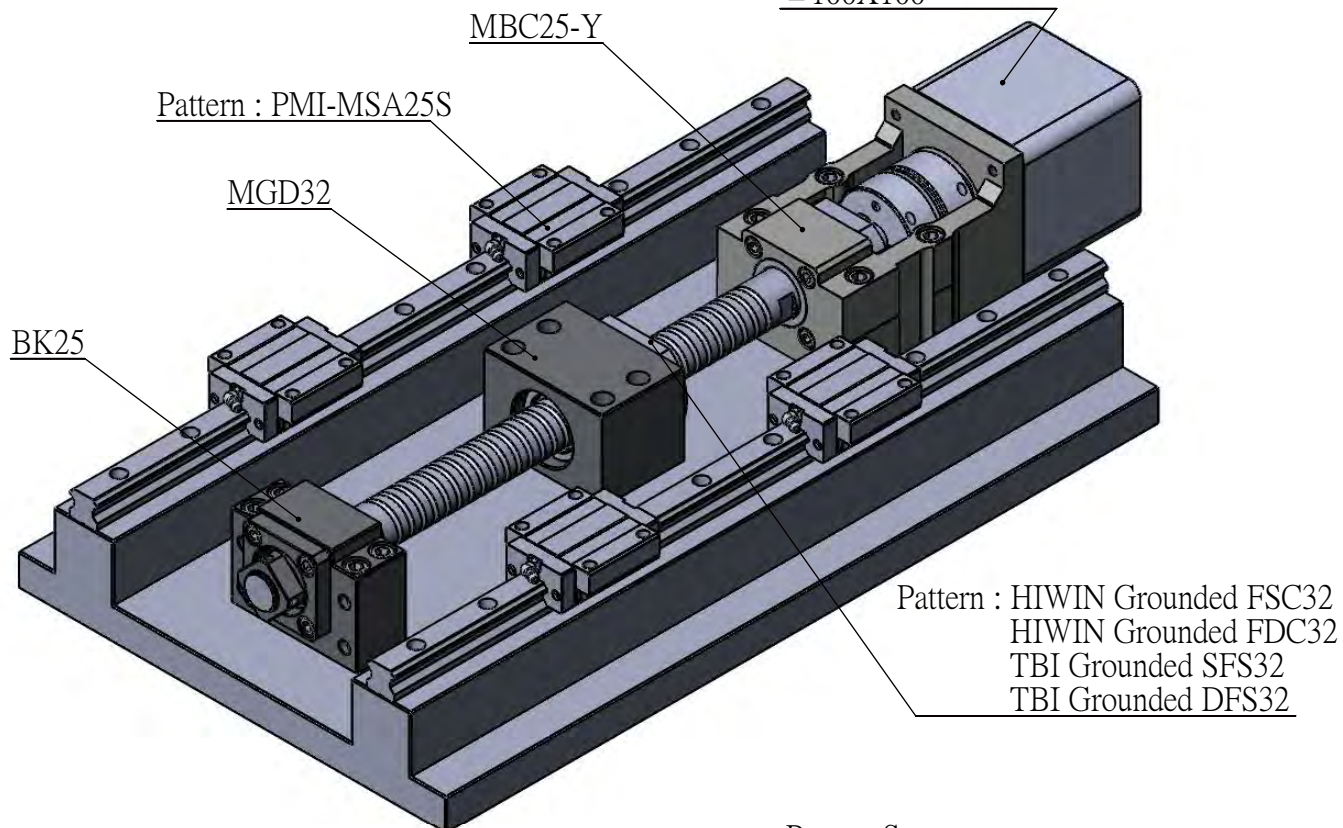

Fixed+Supported

Pattern: Servo motor
DELTA C11020
MITSUBISHI HC-RP103~203
□100X100

