



Motor Bracket MBCK25L/30L/35L/40L (Center height 0 mm)


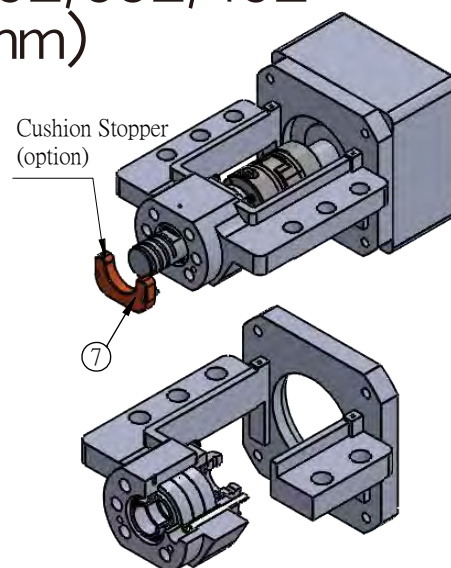


6-Ø14 drill Ø20 counter bore depth

No.	Part name	Qty
1	Housing	1
2	Bearing Use TAC bearings	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set
7	Cushion Stopper (option)	1

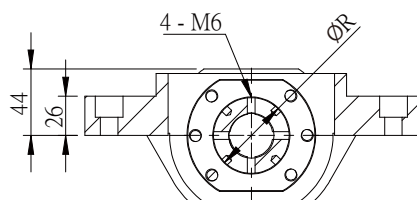

Section U-U

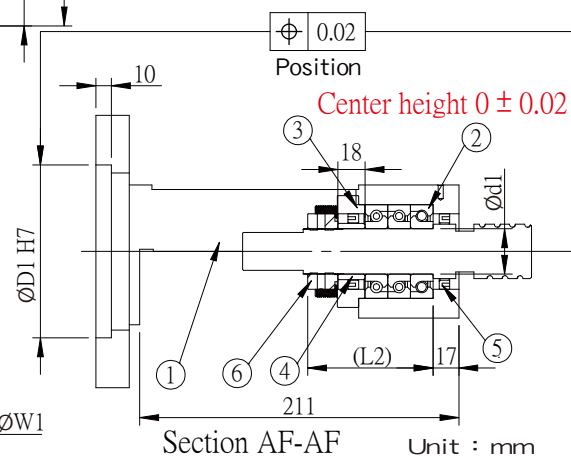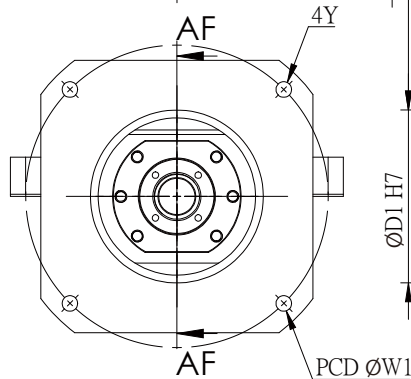

Section AF-AF Unit : mm




	Model No.	D1	W1	Y	Shaft diameter d1	L2	R	Weight (Kgs)	Support unit	Suggest Coupling
									Supported-side	
※	MBCK25L-G	110	145	M8	25	83	45	-	SBK25L SBF25L	ROTEX GS38 ROTEX GS28 MTC-65C-RD
	MBCK25L-I	130	165	M10						
	MBCK25L-J	150	185	M10						
	MBCK25L-H	114.3	200	M12						
※	MBCK30L-G	110	145	M8	30	83	50	-	SBK30L SBF30L	ROTEX GS38 ROTEX GS28 MTC-65C-RD
	MBCK30L-I	130	165	M10						
	MBCK30L-J	150	185	M10						
	MBCK30L-H	114.3	200	M12						
※	MBCK35L-G	110	145	M8	35	85	55	-	SBK35L SBF35L	ROTEX GS38 ROTEX GS28 MTC-65C-RD
	MBCK35L-I	130	165	M10						
	MBCK35L-J	150	185	M10						
	MBCK35L-H	114.3	200	M12						
※	MBCK40L-G	110	145	M8	40	85	60	-	SBK40L SBF35L	ROTEX GS38 ROTEX GS28 MTC-65C-RD
	MBCK40L-I	130	165	M10						
	MBCK40L-J	150	185	M10						
	MBCK40L-H	114.3	200	M12						

※Customized.

Note :1. The matched bearing in the support unit has already done the preload.

2. The matched P5 bearings are assembled in DFD way, which is the most suitable for ball screw use.

New Product

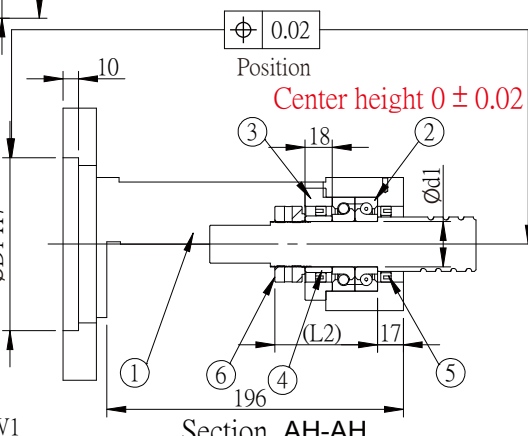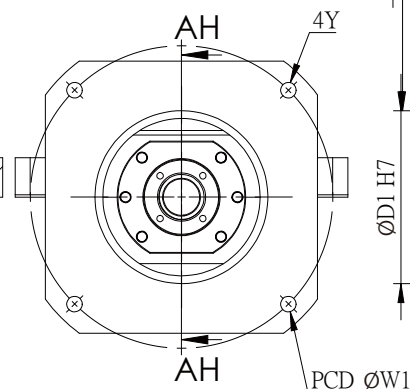


Note : 1. The matched bearing in the support unit has already done the preload.
2. The matched P5 bearings are assembled in DF way, which is the most suitable for ball screw use.

Illustration for MBCK30L

Fixed+Fixed

Pattern: Servo motor
Yaskawa SGMGH-05
MITSUBISHI HF-SP51-81
HF-SP52-152
DELTA G11303

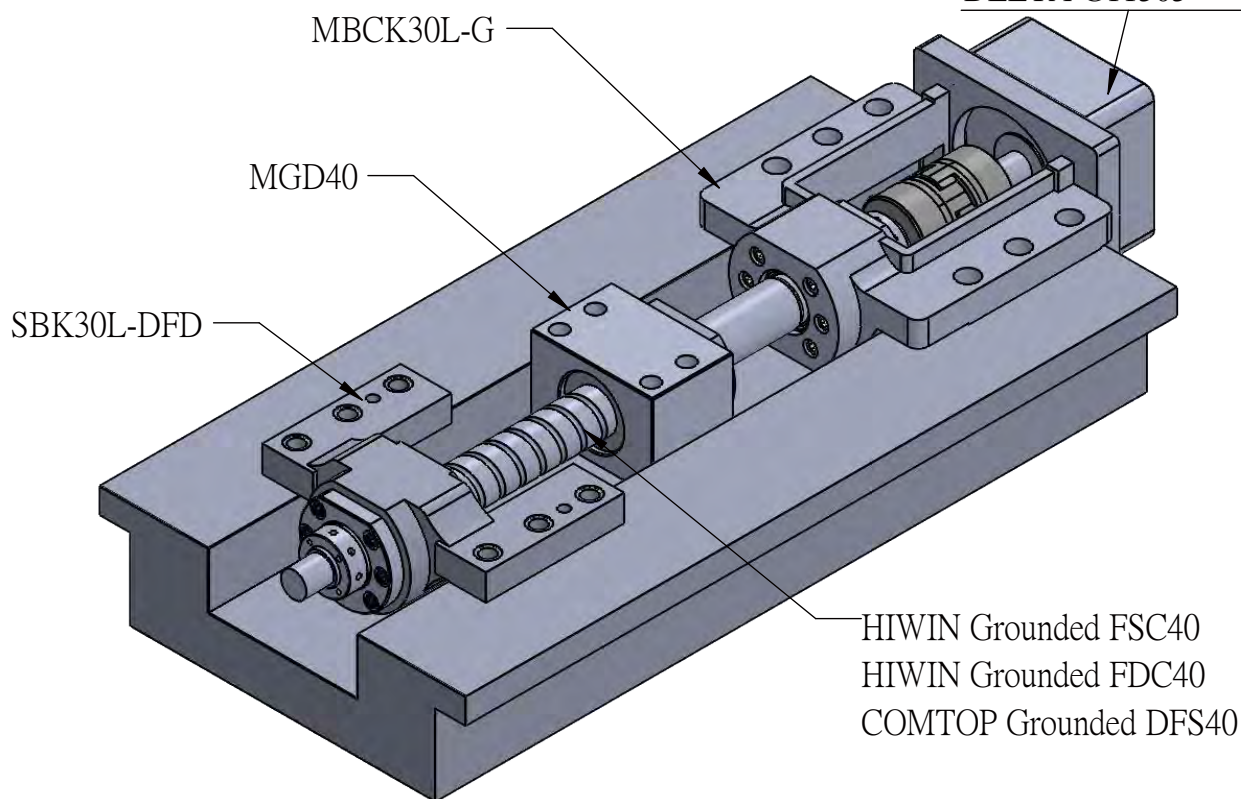

Fixed+Supported

Pattern: Servo motor
Yaskawa SGMGH-05
MITSUBISHI HF-SP51-81
HF-SP52-152
DELTA G11303

