



Support Unit SBK (Heavy-Load & Center height 0 mm type)



No.	Part name	Qty
1	Housing	1
2	Bearing SBK25L/30L/35L/40L with bearings TAC SBKF30L with bearings 7206	1set
3	Holding lid	1
4	Collar	2
5	Seal	2
6	Lock nut	1set

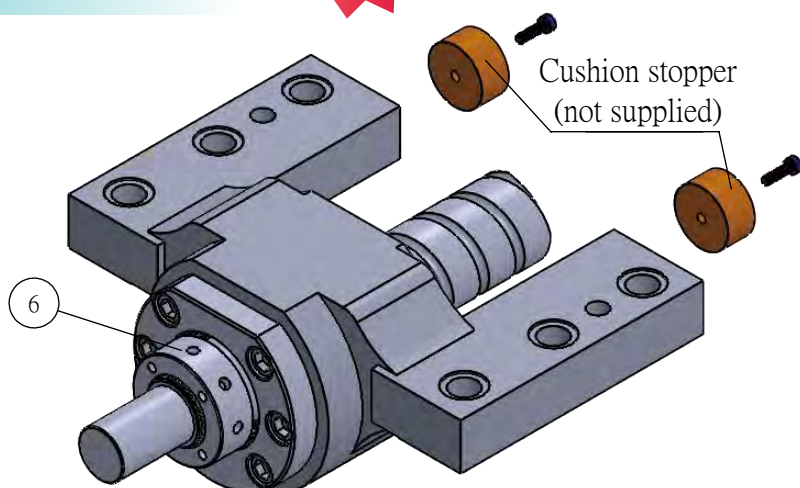


SBK

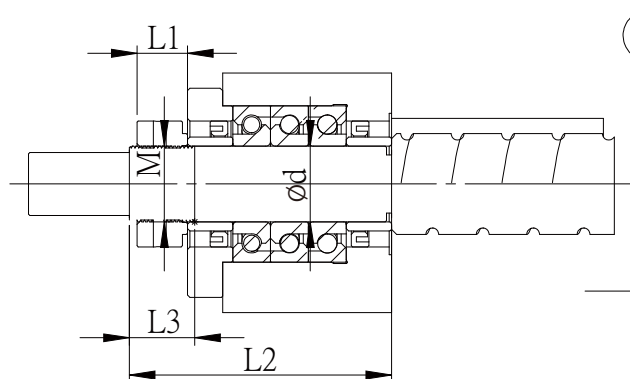


Unit : mm

Model No.	d	L	Dimensions of shaft end			
			M	L1	L2	L3
SBK25L-DF	25	66	M25X1.5	20	89	26
SBK25L-DFD		81			104	
SBK30L-DF	30	66	M30X1.5	20	89	26
SBK30L-DFD		81			104	
SBK35L-DF	35	66	M35X1.5	22	92	30
SBK35L-DFD		81			107	
SBK40L-DF	40	66	M40X1.5	22	92	30
SBK40L-DFD		81			107	
SBKF30L-DF	30	66	M30X1.5	20	89	26

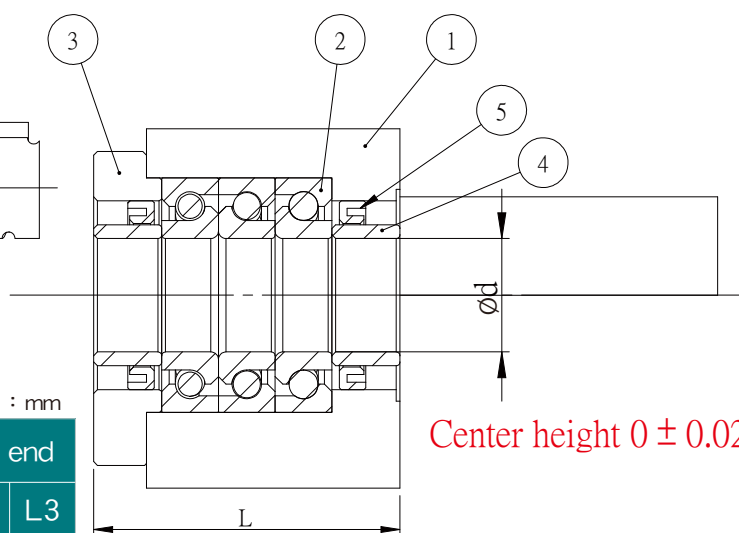

Center height 0 ± 0.02


Assembly way DFD

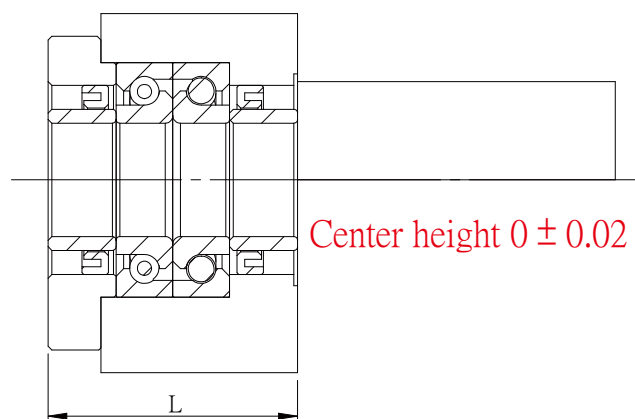

Center height 0 ± 0.02

Assembly way DF

Note : The accuracy of TAC bearing is P4 grade and 7206 is P5 grade.

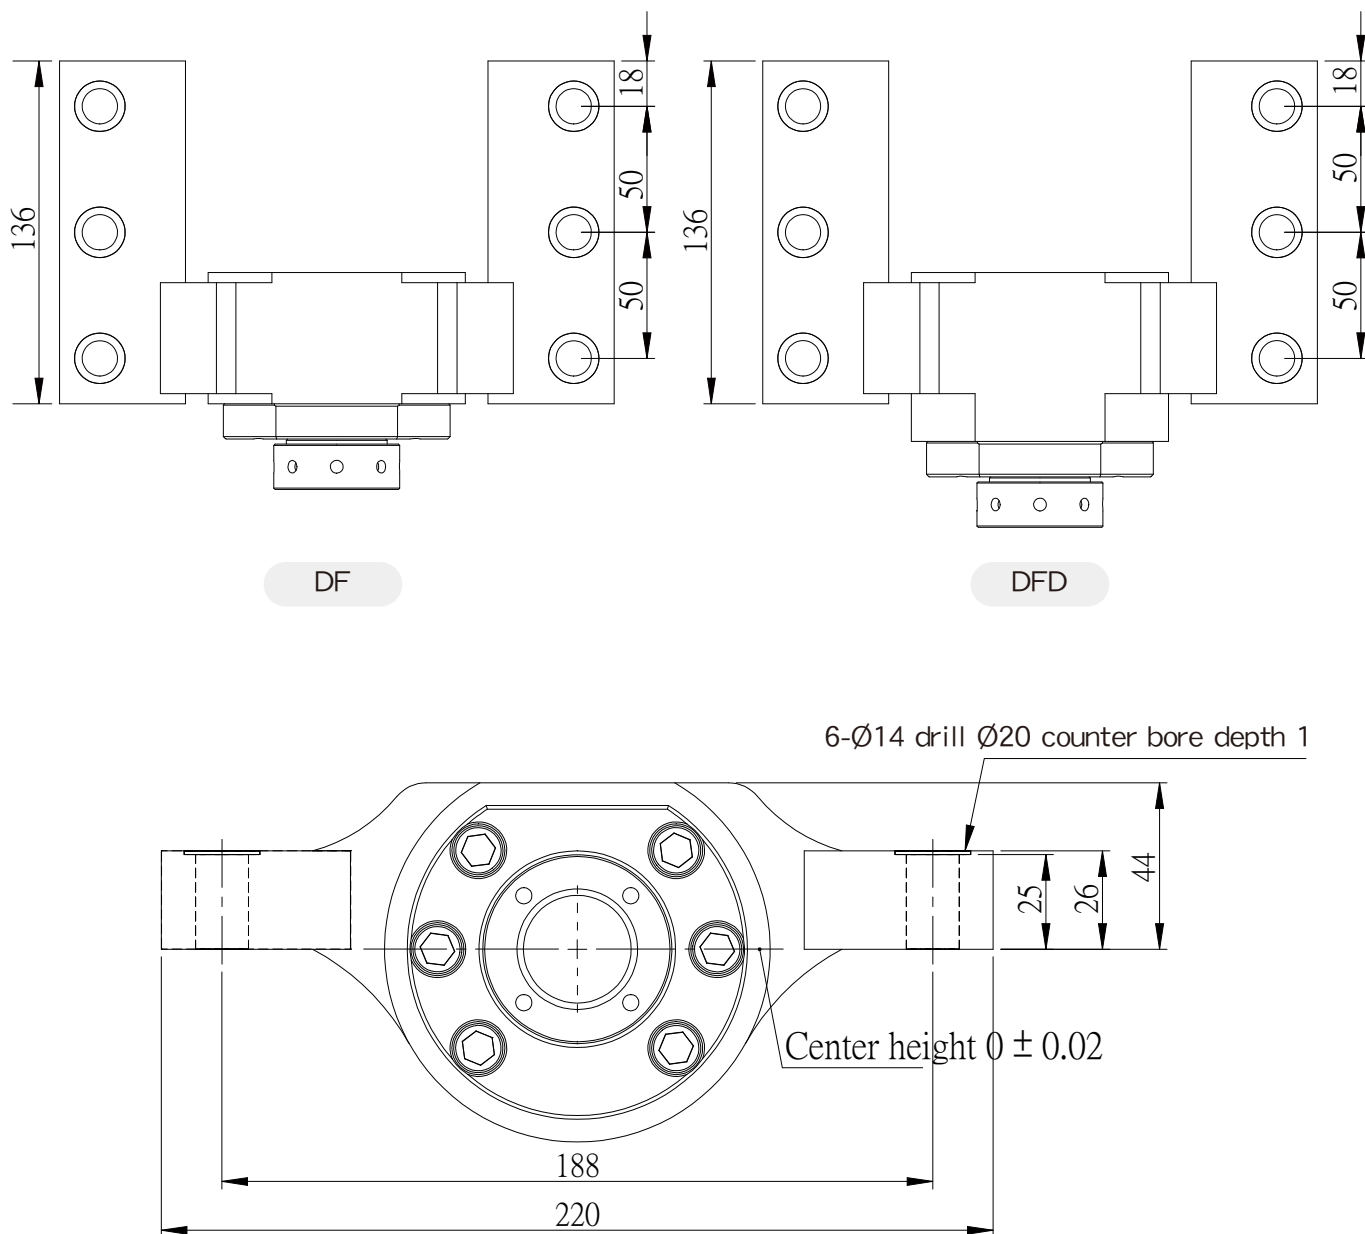


Model No.	Basic dynamic load rating Ca (N)	limiting axial load (N)	preload (N)	axial rigidity (N/ μ m)	starting torque (N · cm)	permissible rotational speed (min ⁻¹)	Weight (Kgs)
SBK25L-DF	29900	40500	2280	850	28	5200	-
SBK25L-DFD	48500	81500	3100	1250	39	5200	
SBK30L-DF	30500	43000	2400	890	29	4900	
SBK30L-DFD	50000	86000	3260	1310	39	4900	
SBK35L-DF	32500	50000	2750	1030	33	4100	
SBK35L-DFD	53000	100000	3740	1500	41	4100	
SBK40L-DF	33500	52000	2860	1080	34	4100	
SBK40L-DFD	54000	104000	3900	1590	43	4100	
SBKF30L-DF	28000	13700	630	210	10		

Support Unit SBF (supported-side Center height 0 mm type)


New Product

Cushion stopper
(not supplied)



No.	Part name	Qty
1	Housing	1
2	Bearing	1 set
3	Snap ring	1

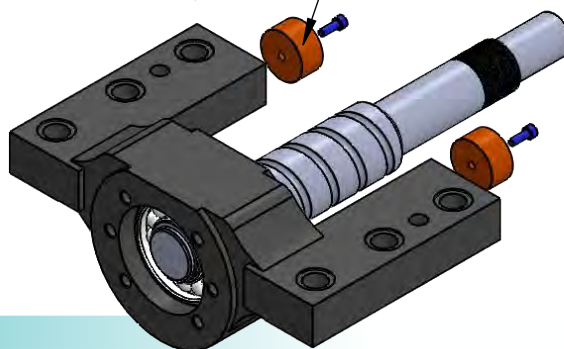

SBF

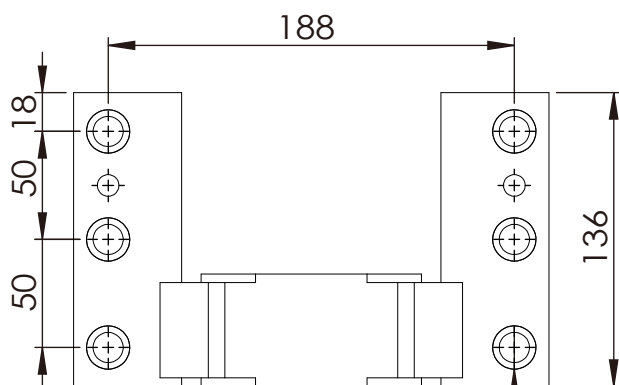

6 x Ø 14 THRU
Ø 20 ∇ 1

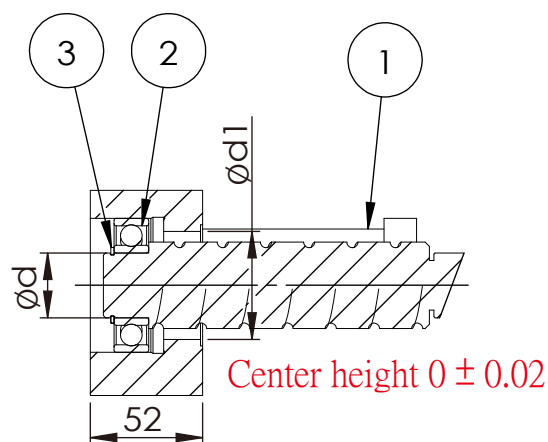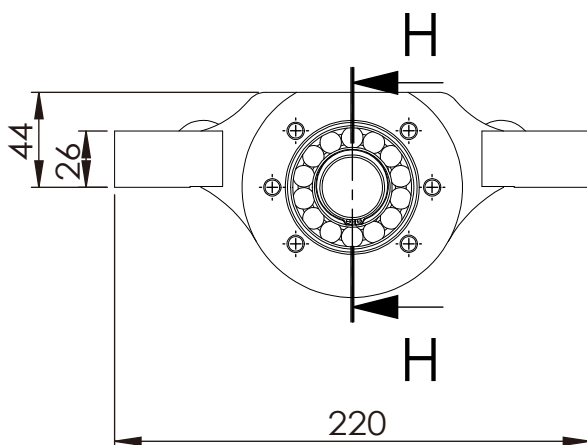

Section H-H

Unit : mm

Model No.	Shaft diameter Ød	Ød1	Bearing	Snap ring	Weight (Kgs)
SBF25L	25	50	6305ZZ	S25	4.7
SBF30L	30	50	6206ZZ	S30	4.7
SBF35L	35	62	6207ZZ	S35	4.3

Note :

1. Inside bearings use Japanese & Taiwanese P4 grade TAC 60 degree contact ball bearing.